


## 783 MHz Chip Antenna

Johanson Technology, Inc. (JTI) miniature RF ceramic chip antennas are made using Low Temperature Co-fired Ceramic (LTCC) technology which has the ability to embed low and high dielectric constants inside our antenna. This enables our components to have high detuning resilience and stability over extreme temperatures (~2ppm).

Recommended mounting locations for this antenna

PCB End

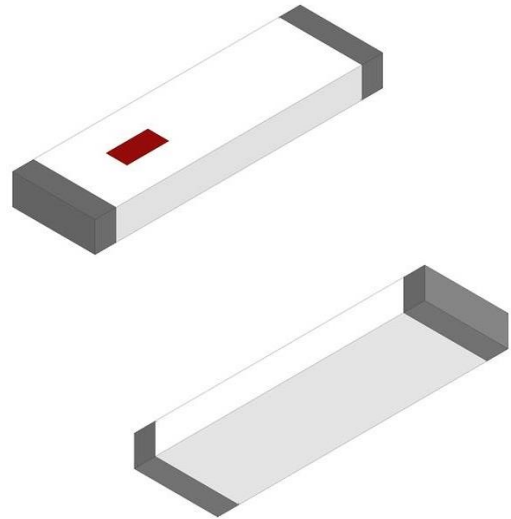

### General Specifications<sup>1 2</sup>

Passband Frequency (MHz)	779 - 787
Impedance ( $\Omega$ )	50
Return Loss (dB)	9.5 Min.
Peak Gain (dBi)	-1.5 Typ.
Average Gain (dBi)	-7.0 Typ.
Average Radiated Efficiency (%)	25

### Maximum Ratings



Power Capacity (W)	2 Max. (CW)
Operating Temperature ( $^{\circ}\text{C}$ )	-40 to +85
Recommended Storage Conditions post-installation ( $^{\circ}\text{C}$ )	-40 to +85
Recommended Storage Conditions and Period for Unused T&R Product	45% - 75% RH +5 to +35 $^{\circ}\text{C}$ 18 Months Max.

<sup>1</sup> Typical value represents average measurement at 25 $^{\circ}\text{C}$ . Min./Max. values represent measurements over specified operating temperature.

<sup>2</sup> General specifications measured on Johanson's evaluation board P/N 0783AT43A0008001CE1.


**Mechanical Dimensions**

	Inches			Millimeters		
<b>L</b>	0.276	±	0.008	7.00	±	0.20
<b>W</b>	0.079	±	0.008	2.00	±	0.20
<b>T</b>	0.031	+0.004/-0.008		0.80	+0.10/-0.20	
<b>a</b>	0.020	±	0.012	0.50	±	0.30

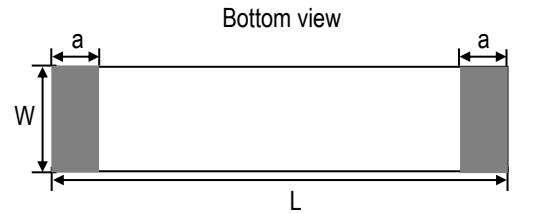

**Terminal Configuration<sup>3</sup>**

Pin Number	Function
1	Feed
2	NC*

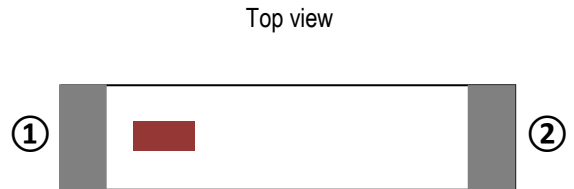


<sup>3</sup> The termination type is Nickel Tin. Go to: <https://www.johansontechnology.com/ipcsoldering-profile> for Typical Soldering Profile.


\* This terminal must be soldered for anchoring and mechanical stability.

**Evaluation Board and Recommended Mounting Configuration (P/N 0783AT43A0008001CE1)**

All units in mm

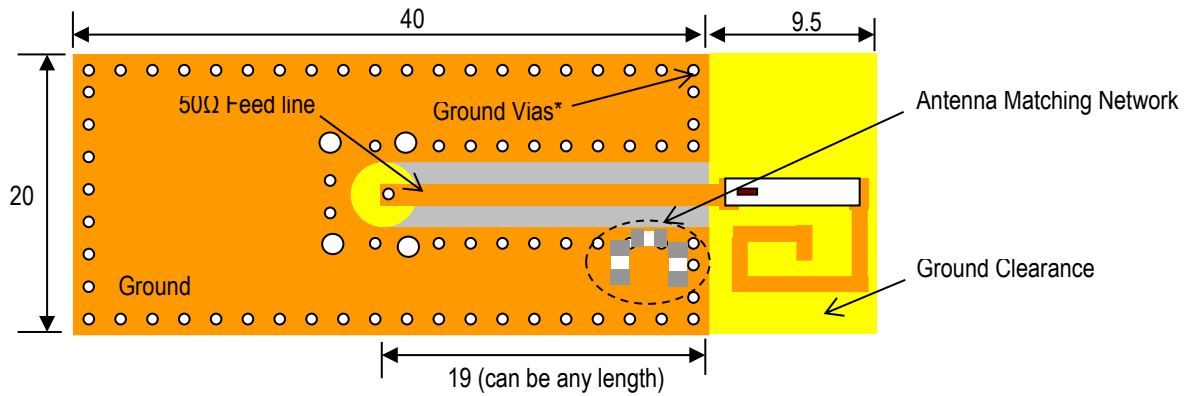

\*Note: Ground Vias are highly recommended to have better antenna efficiency.

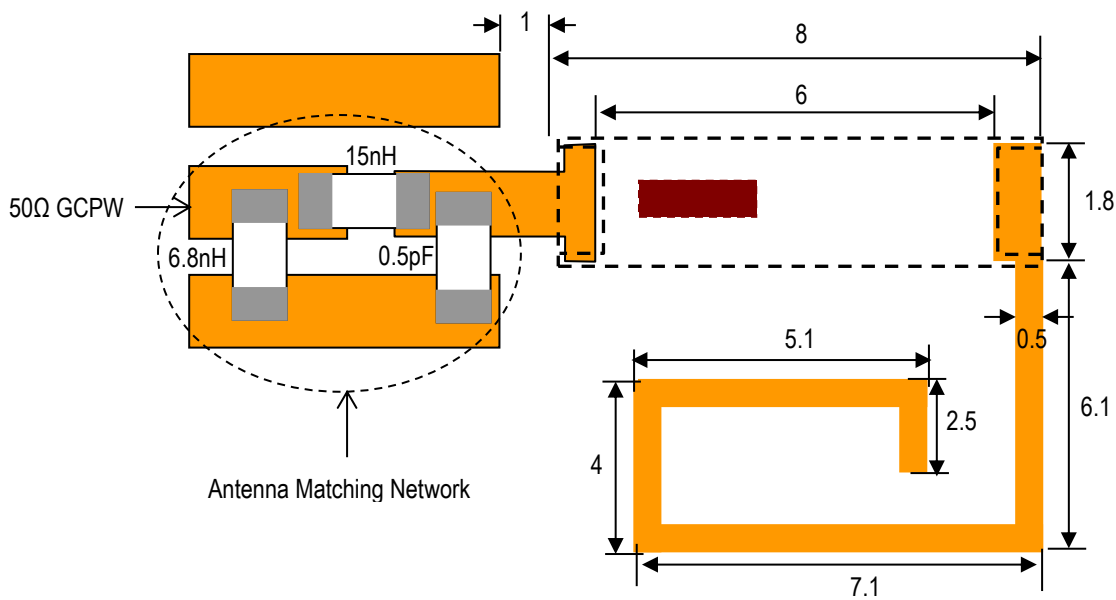

JTI P/N's for Matching Network<sup>4</sup>

Inductor (6.8nH): LRC0402CJ6N8GV001T

Inductor (15nH): LRC0402CJ15NGV001T


Cap (0.5pF): QSCF500Q0R5B1GV001T

If you'd like the CAD PCB layout or have any questions,  
contact our application engineers at <https://www.johansontechnology.com/ask-a-question>


<sup>4</sup> It is recommended that the designer leave available slots for a "pi" (shunt-series-shunt) network. The antenna matching network values above are used when the antenna is mounted on Johanson's evaluation board. The optimal matching values will vary depending on the layout, thickness, material, etc. Go to: <https://www.johansontechnology.com/tuning> for more information.

**Evaluation Board Typical Return Loss Measurement (P/N 0783AT43A0008001CE1)**

With matching network

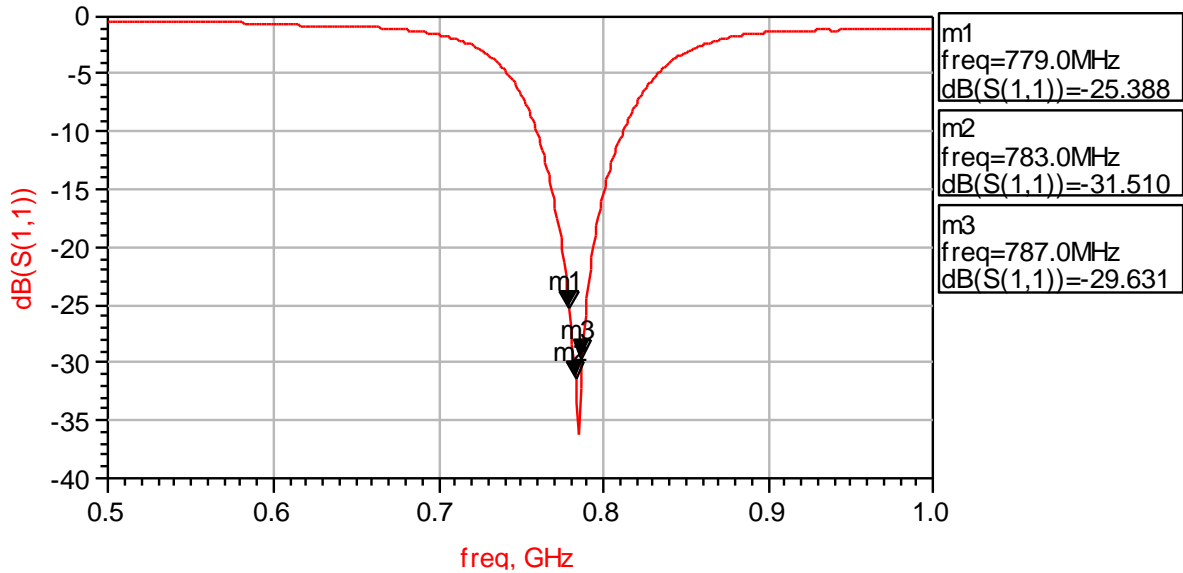


**Evaluation Board 2D Radiation Patterns @783MHz (P/N 0783AT43A0008001CE1)**

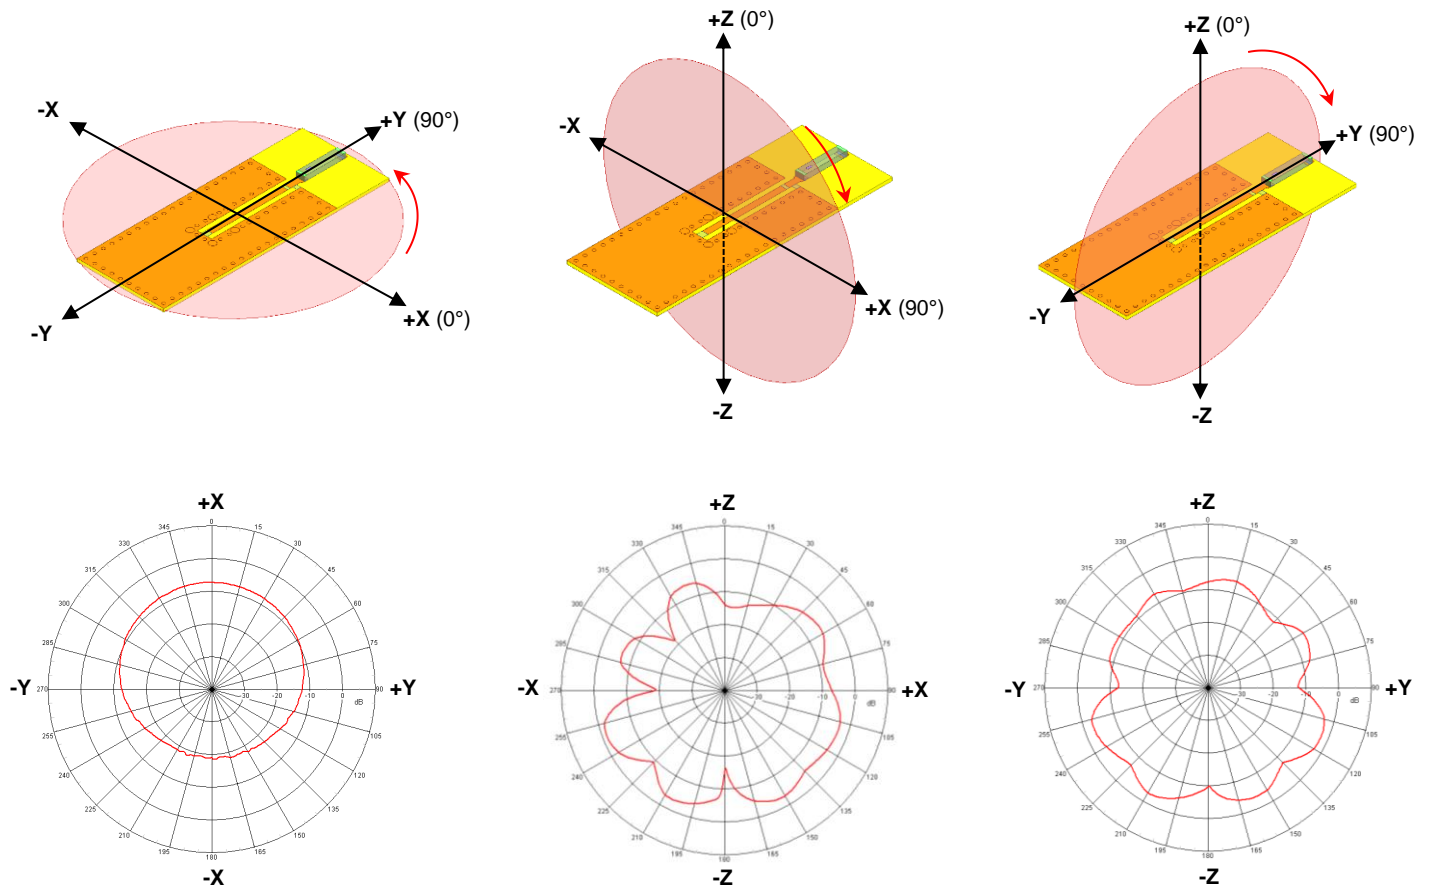


**Tape and Reel Specification (Units in mm)**

**Tape Dimensions**

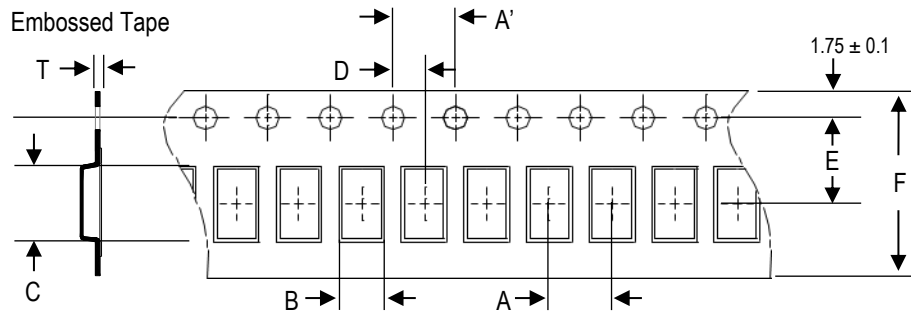


A	A'	B	C	D	E	F	T	Quantity/reel	Tape material
4.0±0.1	4.0±0.1	2.4±0.1	7.3±0.1	2.0±0.05	5.5±0.1	12.0±0.1	1.45±0.1	1,000pcs	Plastic (Embossed)

**Reel Dimensions**

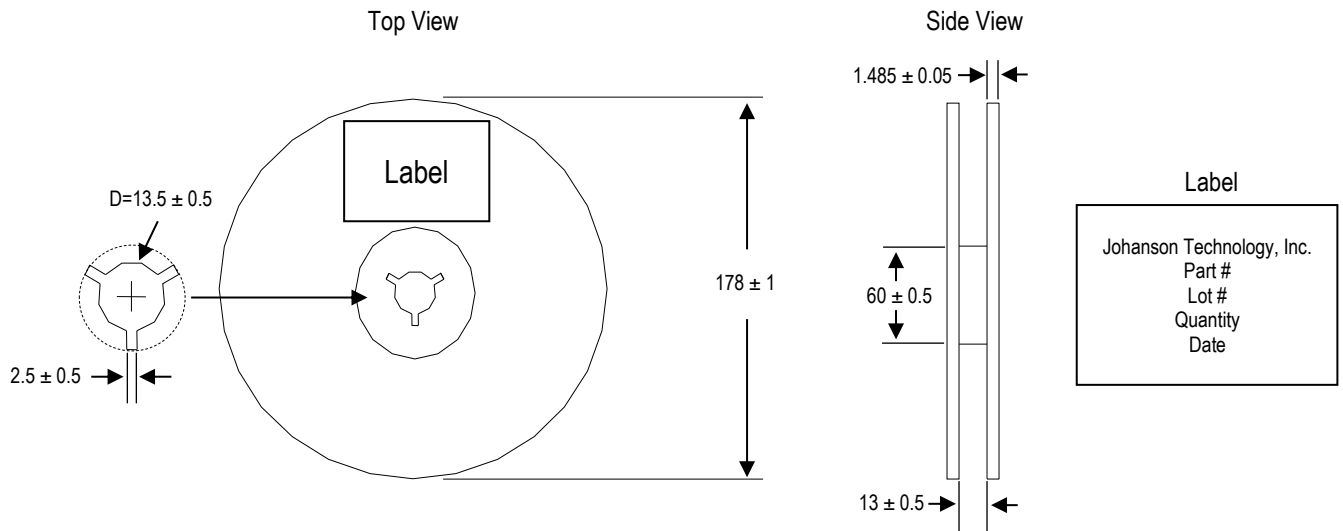

**Leader and Trailer Dimensions**

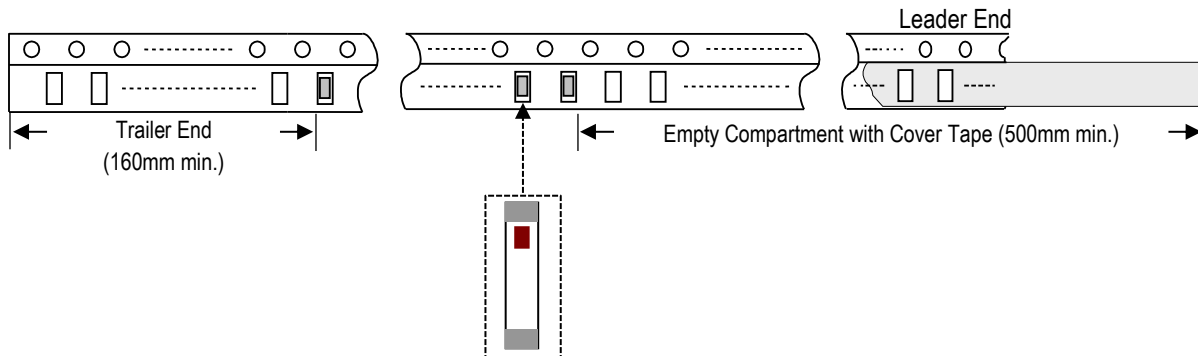

**Orderable Part Number**

Packaging Style	Part Number	Termination
Bulk (loose pcs.)	0783AT43A0008001B	Nickel Tin
T & R (7" Reel Embossed Tape)	0783AT43A0008001E (Qty: 1,000 pcs/reel)	
Evaluation Board with 1 SMA Connector	0783AT43A0008001CE1	

**Important Links**

[0783AT43A0008001E Product Page](#)

[More Chip Antennas](#)

[Antenna Tuning, Optimization, and Validation Services](#)

[Soldering Information](#)

[MSL Information](#)

[Packaging Information](#)

[Recommended Storage Condition and Max Shelf Life](#)

[RoHS Compliance](#)

*Contact our application engineers for a PCB layout review*

**Johanson Technology, Inc. reserves the right to make design changes without notice.**

**All sales are subject to Johanson Technology, Inc. terms and conditions.**