




Ceramic Resonator Filter Tape & Reel packaging


Tape Specifications

Tape Dimensions & Quantity (Units in mm)

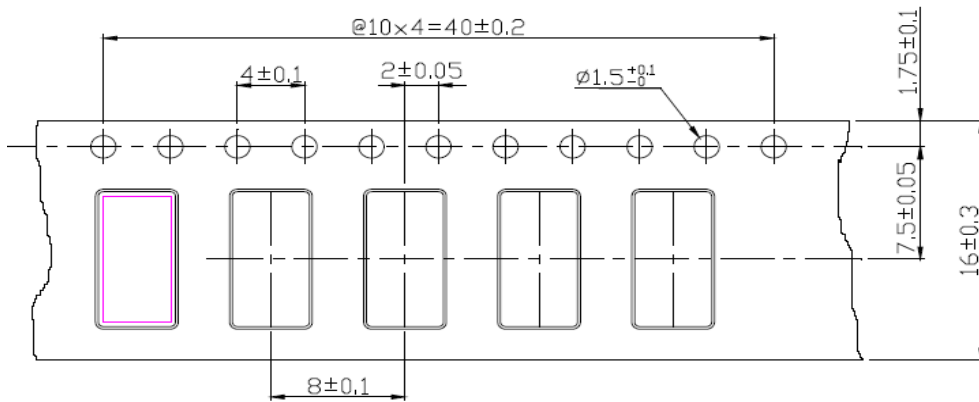

Applicable Part Numbers

5697BP45A0360
5697CR45A0360





Applicable Part Numbers

5235BP45A0180
5235CR45A0180


Reel Dimensions (Units in mm)

Label: Customer's Name, Johanson P/N, Quantity, Date
Reel Material: Plastic

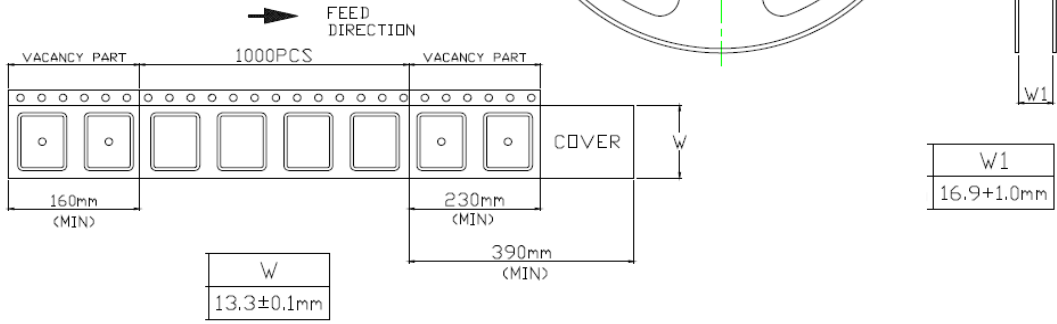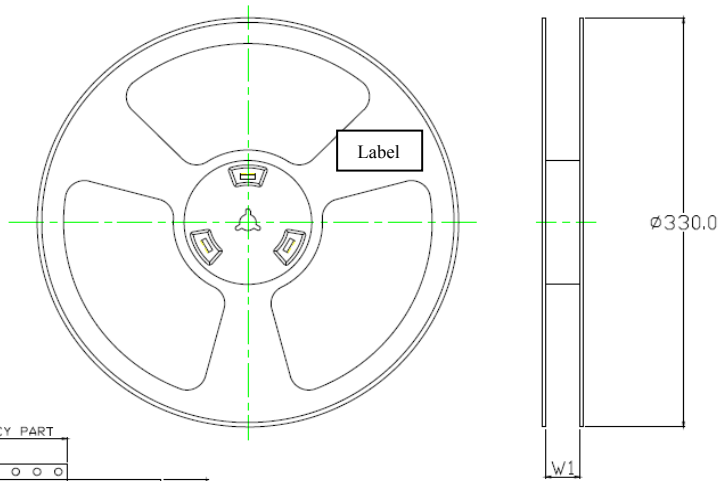

Peel-off Force

Peel-off force should be in the range of 0.1 – 0.6 N at a peel-off speed of 300 ± 10 mm/min.

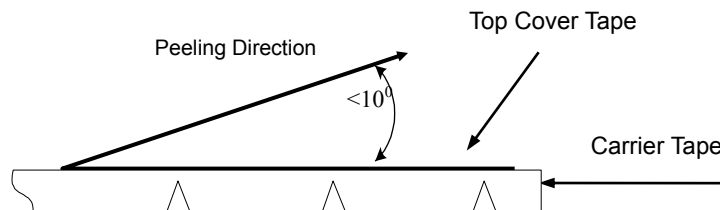

Recommended Storage Conditions for unused product on T&R

- Temperature: 15 - 35° C and relative humidity (RH): 45 - 75%.
- Non-corrosive environment
- It is recommended that product be used within 18 months of receipt

Due to silver terminations, these components require vacuum sealed packaging when stored