


2.44 GHz RF Chip Antenna, *Above Metal**, AEC-Q200 Qualified

- 2.4 – 2.48 GHz operational frequency
- Bluetooth, WLAN
- SMD, 5.0x2.0x1.5mm (LxWxT)
- Center-edge mount, circular PCB
- RoHS compliant

Johanson Technology, Inc. (JTI) miniature RF ceramic chip antennas are made using Low Temperature Co-fired Ceramic (LTCC) technology which has the ability to embed low and high dielectric constants inside our antenna. This enables our components to have high detuning resilience and stability over extreme temperatures (~2ppm).

**This antenna will generally have a metal layer directly underneath for proper operation, exceptions may apply.*

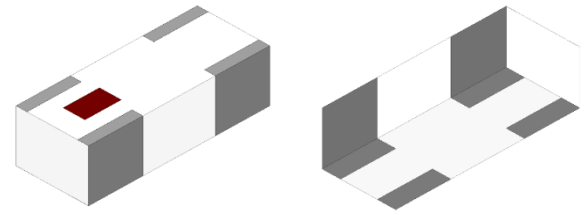


Recommended mounting locations for this antenna

PCB Center-edge



Circular



General Specifications^{1 2}

Operational Frequency (MHz)	2400 - 2480
Impedance (Ω)	50
Return Loss (dB)	4.4 Min.
Peak Gain (dBi)	-2.0 Typ.
Average Gain (dBi)	-5.0 Typ.
Average Radiated Efficiency (%)	21

Maximum Ratings



Power Capacity (W)	2 Max. (CW)
Operating Temperature ($^{\circ}\text{C}$)	-40 to +105
Recommended Storage Conditions post-installation ($^{\circ}\text{C}$)	-40 to +105
Recommended Storage Conditions and Period for Unused T&R Product	45% - 75% RH +5 to +35 $^{\circ}\text{C}$ 18 Months Max.

¹ Typical value represents average measurement at 25 $^{\circ}\text{C}$. Min./Max. values represent measurements over specified operating temperature.

² General specifications measured on Johanson's evaluation board P/N 2450AT42E0100001CE1.


Mechanical Dimensions

	Inches			Millimeters		
L	0.197	±	0.008	5.00	±	0.2
W	0.079	±	0.008	2.00	±	0.2
T	0.059	±	0.008	1.50	±	0.2
a	0.020	±	0.008	0.50	±	0.2
b	0.059	±	0.008	1.50	±	0.2
c	0.012		Max.	0.30		Max.

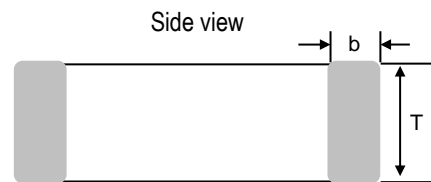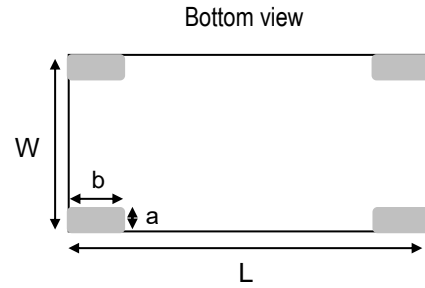

Terminal Configuration³

Pin Number	Function
1	Feed
2	NC*
3	GND
4	GND


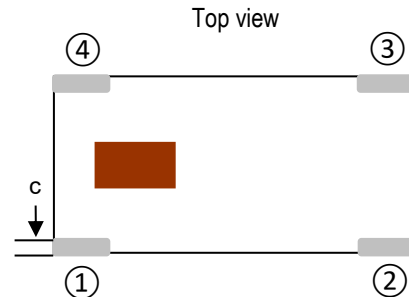


³ The termination type is Nickel Tin. Go to: <https://www.johansontechnology.com/ipcsoldering-profile> for Typical Soldering Profile.


* This terminal must be soldered for anchoring and mechanical stability.

Evaluation Board and Recommended Mounting Configuration (P/N 2450AT42E0100001CE1)

All units in mm

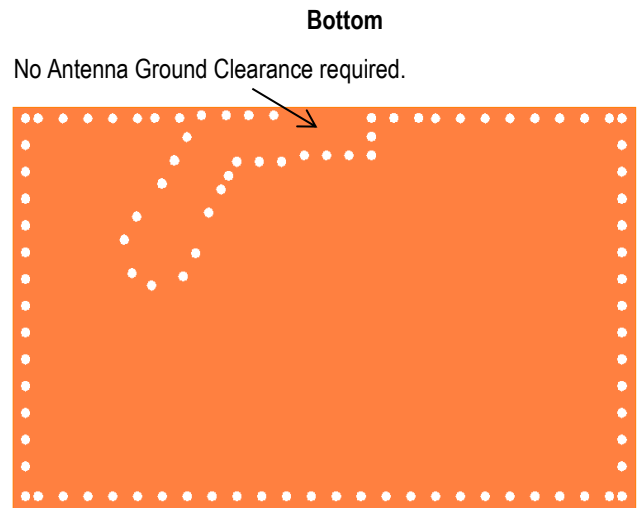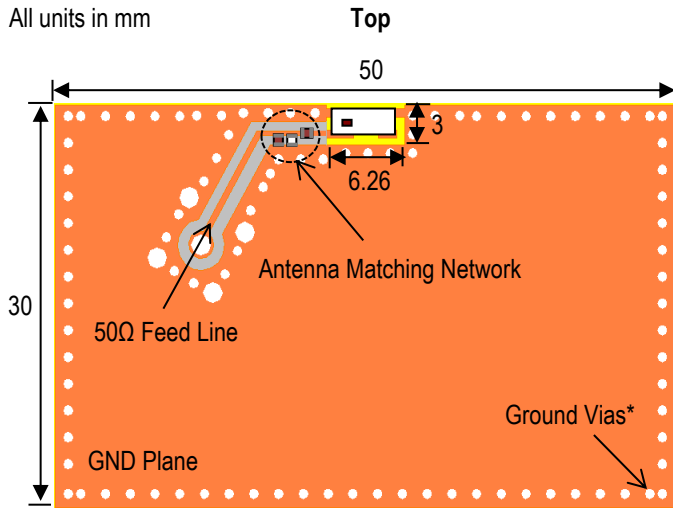

Metal bottom GND plane to be placed directly underneath yellow solder mask zone, covering entire area.

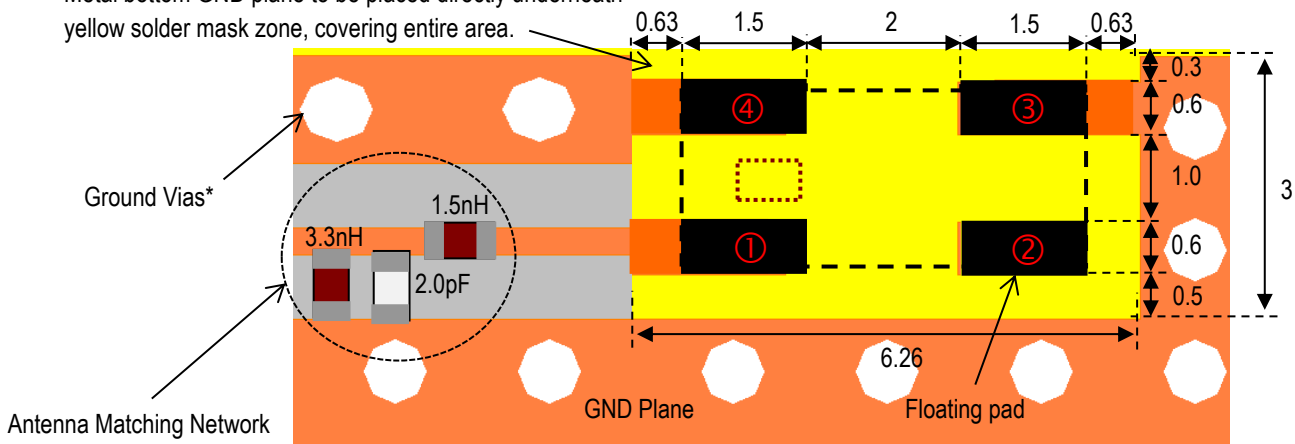

JTI P/N's for Matching Network⁴

Inductor (1.5nH): LRC0402CS1N5GV001T

Capacitor (2.0pF): QSCF500Q2R0B1GV001T


Inductor (3.3nH): LRC0402CS3N3GV001T

*Note: Ground Vias are highly recommended to have better antenna efficiency.


If you'd like the CAD PCB layout or have any questions,
contact our application engineers at <https://www.johansontechnology.com/ask-a-question>

⁴ It is recommended that the designer leave available slots for the topology of the network. The antenna matching network values above are used when antenna is mounted on Johanson's evaluation board. The matching values on client's PCB will be different, depending on the layout, thickness, material, etc. Go to: <https://www.johansontechnology.com/tuning> and see how to obtain the new values.

Evaluation Board Typical Return Loss Measurement (P/N 2450AT42E0100001CE1)

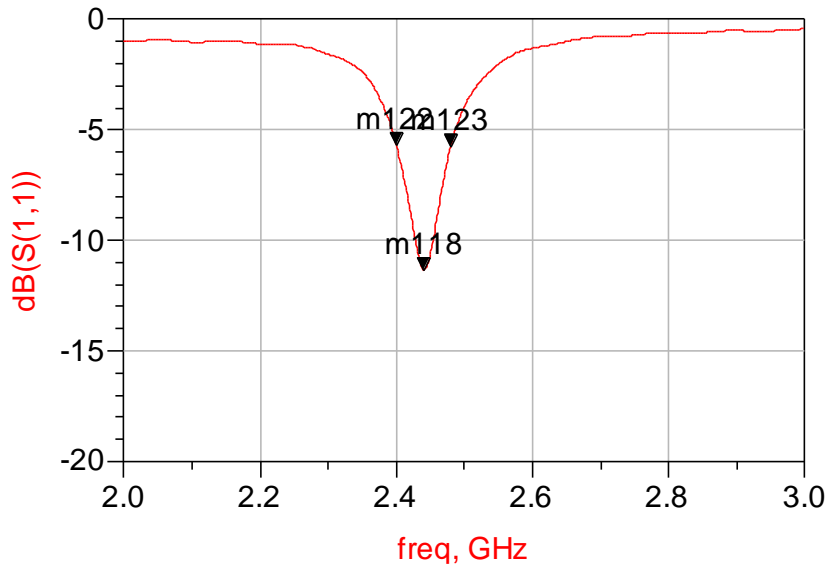



Evaluation Board Typical 2D Radiation Patterns @2440 MHz (P/N 2450AT42E0100001CE1)

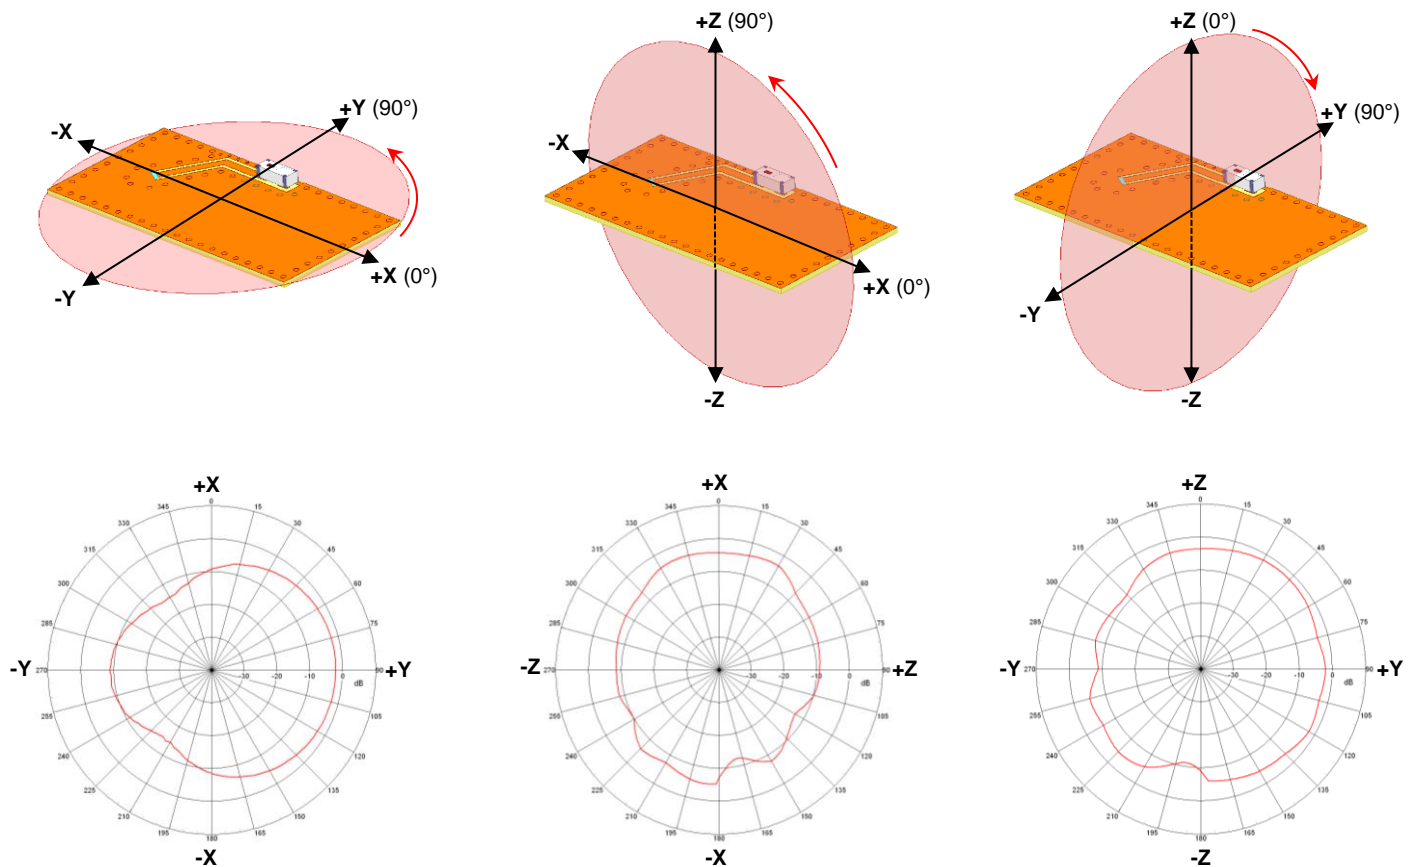

Recommended Mounting Consideration for Circular PCBs (no evaluation board available)



All units in mm

Top

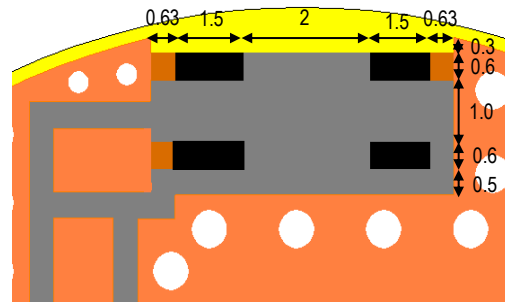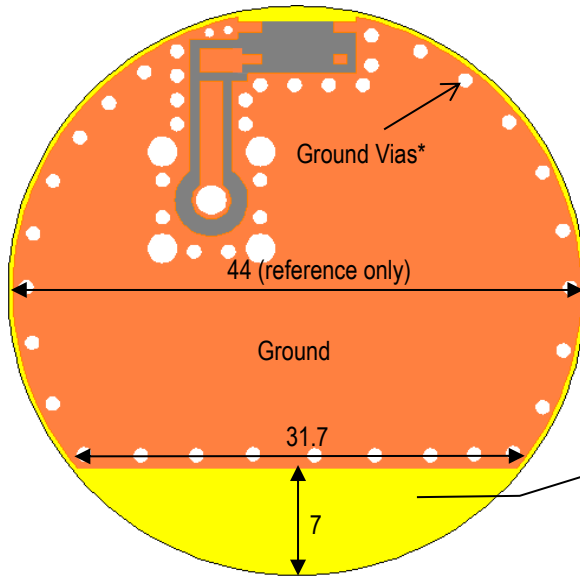

Receding the GND plane helps shape the radiation pattern in a more isometric (spherical) shape. We recommend this layout if space allows.

Bottom

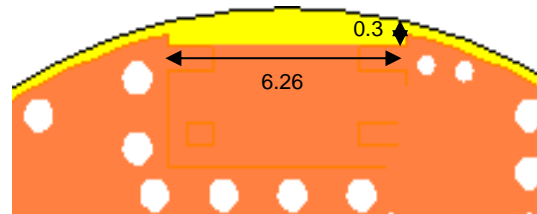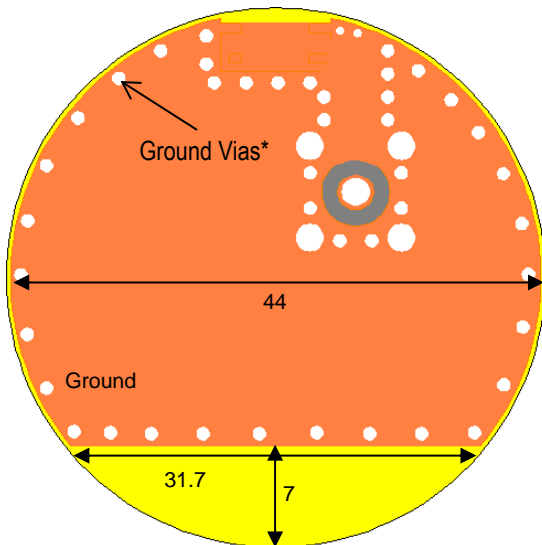


*Note1: Ground Vias are highly recommended to have better antenna efficiency.

If you have any questions regarding the implementation of this antenna in your PCB's layout, please contact our application engineers at <https://www.johansontechnology.com/ask-a-question>

Antenna Variant Based on Substrate Thickness

Since the antenna's efficiency is largely affected by the thickness of the PCB's substrate, we offer another variant of this antenna. This allows a more robust design to fit your PCB. The disparity between antenna variations is internal only; variations are identical in dimension and footprint compatible.

Refer to the diagram below to understand what is meant by substrate thickness.

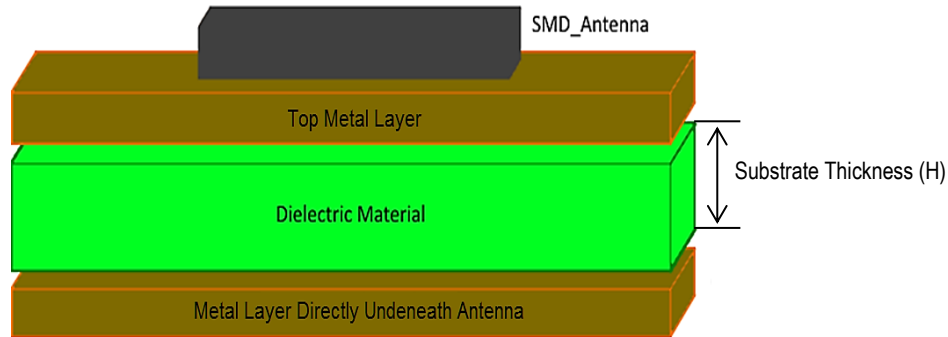

PCB Substrate Thickness	Recommended JTI P/N
≤1.0mm	2450AT42E0100002E
1.1mm - 2.5mm	2450AT42E010B002E

Antenna Variant Typical Efficiency Values @2.44GHz on 30x50 mm PCB

The below table represents simulated values and are for reference only.


PCB Substrate Thickness	Antenna Efficiency @2.44 GHz	
	2450AT42E0100002E	2450AT42E010B002E
H = 0.12 mm	1.95%	1.02%
H = 0.7 mm	29.20%	9.30%
H = 1.5 mm	23.30%	38.00%
H = 2.5 mm	21.60%	42.00%




Recommended Antenna Orientation

2450AT42E0100002E is not symmetrical internally and therefore it is not recommended to mirror the layout. We recommend designers to mount the antenna in the orientation of our recommended layout.

Recommended Layout

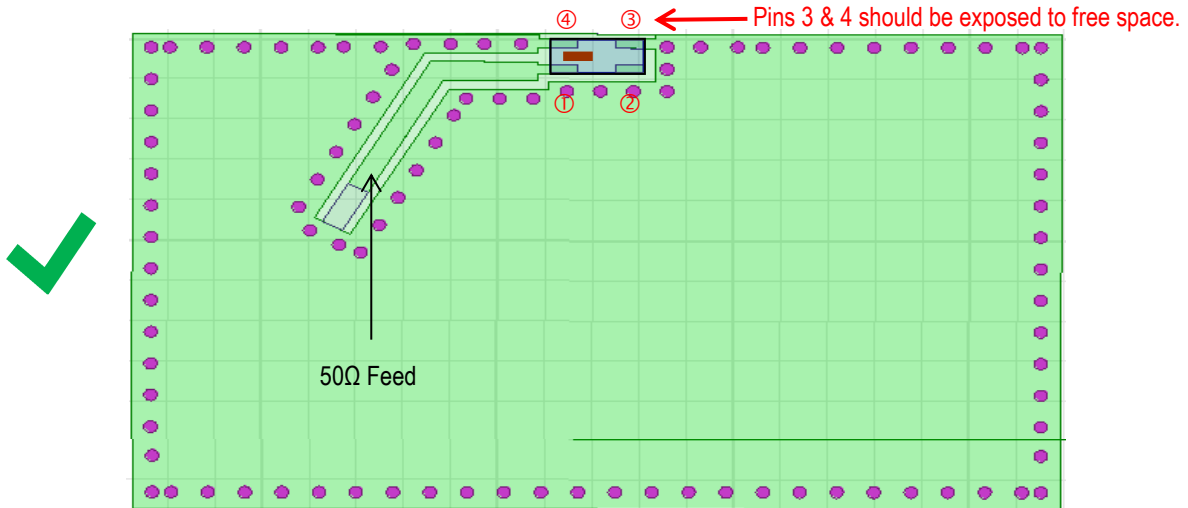


Right-feed Layout

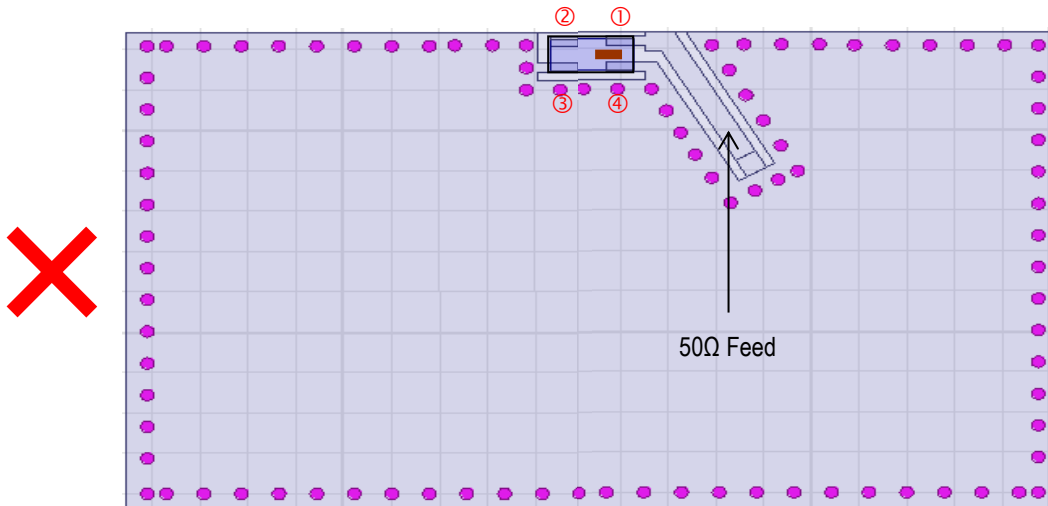


Tape and Reel Specification (Units in mm)

Tape Dimensions

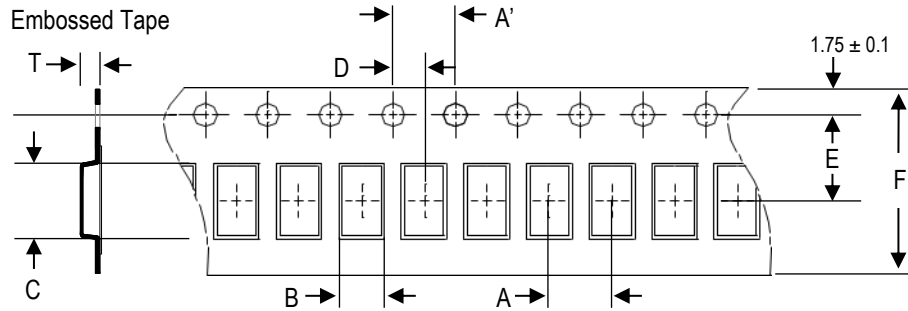


A	A'	B	C	D	E	F	T	Quantity/reel	Tape material
4.0±0.1	4.0±0.1	2.4±0.1	5.4±0.1	2.0±0.05	5.5±0.1	12.0±0.1	1.8±0.1	2,000pcs.	Plastic (Embossed)

Reel Dimensions

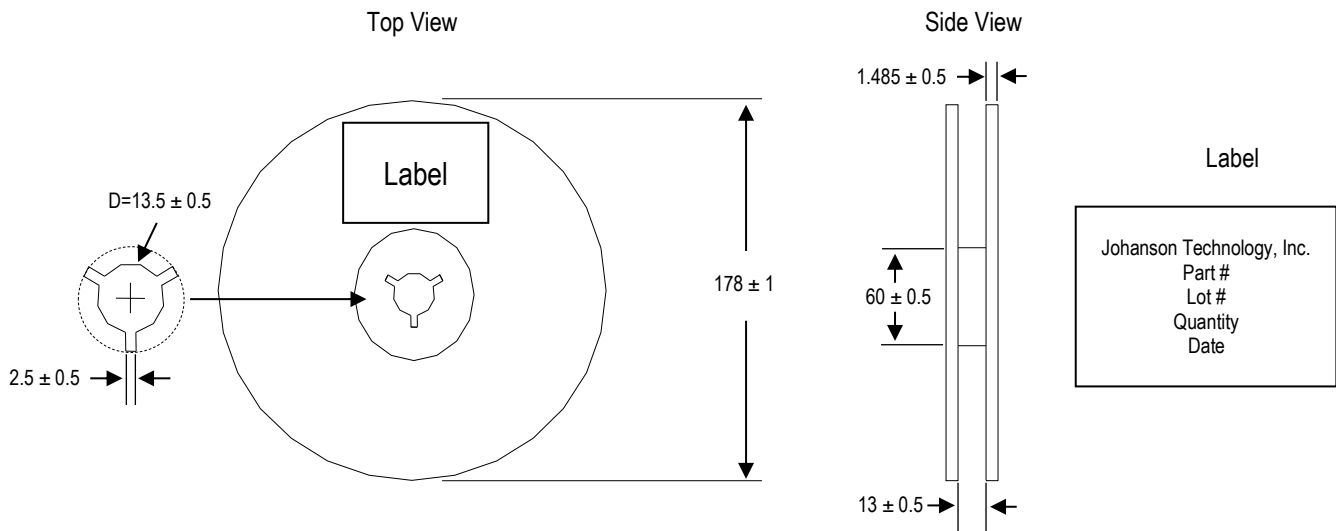

Leader and Trailer Dimensions

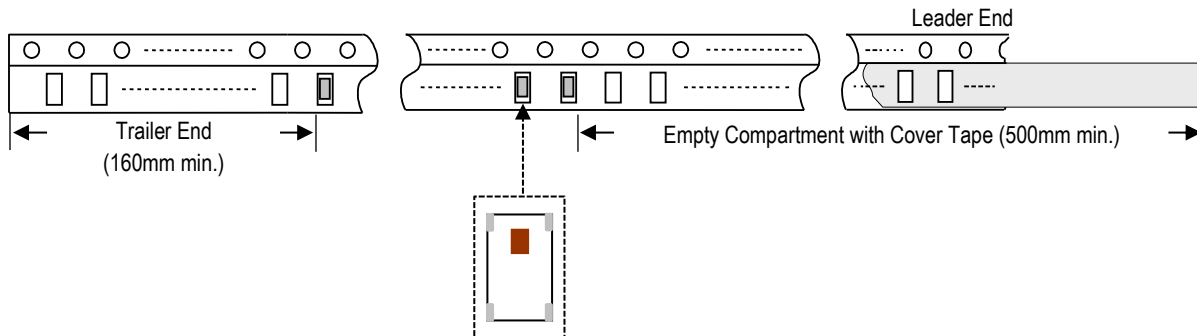

Orderable Part Number

Packaging Style	Part Number	Termination
Bulk (loose pcs.)	2450AT42E0100002B	Nickel Tin
T & R (7" Reel Embossed Tape)	2450AT42E0100002E (Qty: 2,000 pcs./reel)	
Evaluation Board with 1 SMA Connector	2450AT42E0100001CE1	

Important Links

[2450AT42E0100002E Product Page](#)

[More RF Chip Antennas](#)

[Antenna Tuning, Optimization, and Validation Services](#)

[Soldering Information](#)

[MSL Information](#)

[Packaging Information](#)

[Recommended Storage Condition and Max Shelf Life](#)

[RoHS Compliance](#)

Contact our application engineers for a PCB layout review.

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.