


SLC MICROWAVE / MILLIMETERWAVE CAPACITORS

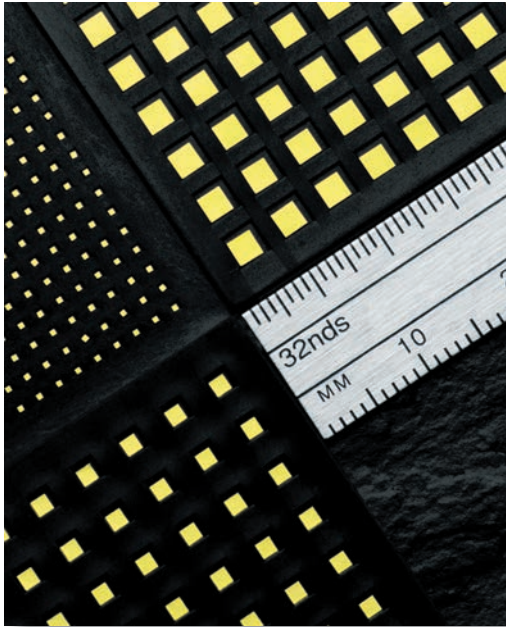

KEY FEATURES

- Ceramic SLC Low Profile Devices Exhibit Very High-Q / Low Insertion Loss, SRFs to 50 GHz
- Thin Film Gold Electrodes Provide Superior Wire Bonding & Die Attach Performance
- Four SLC Device Types to Fit Many Applications:

Standard (Die) SLCs	Border SLCs
Bar SLC Arrays	Custom SLC Products
- RoHS - Available on all dielectrics
- Custom sizes are available - please consult factory

APPLICATIONS

- Microwave Integrated Components
- GaAs Integrated Circuits
- RF/Microwave Components
- DC Block, Bypass, Tuning

DIELECTRIC CHARACTERISTICS

DIELECTRIC CODE	CONSTANT (K)	TEMPERATURE COEFFICIENT *	TEMPERATURE RANGE	DISSIPATION FACTOR	INSULATION RESISTANCE	TEST COND.	AVAILABLE TOLERANCES
C	23	0 ± 30 ppm	-55°C to +125°C	≤ 0.15%	> 1000 GΩ	1	B,C,D (A, <2pF)
K	37	0 ± 30 ppm	-55°C to +125°C	≤ 0.15%	> 1000 GΩ	1	B,C,D (A, <2pF)
N	80	0 ± 30 ppm	-55°C to +125°C	≤ 0.15%	> 1000 GΩ	1	B,C,D (A, <2pF) (F - K, >10 pF)
U	120	-750 + 100ppm / -308ppm	-55°C to +125°C	≤ 0.25%	> 1000 GΩ	1	J,K (B-D)
V	160	-1500 + 500ppm / -946ppm	-55°C to +125°C	≤ 0.25%	> 1000 GΩ	1	J,K (B-D)
R	280	-2200 + 500ppm / -1086ppm	-55°C to +125°C	≤ 0.25%	> 1000 GΩ	1	J,K (B-D)
L	350	-3300 + 500ppm / -1306ppm	-55°C to +125°C	≤ 1.50%	> 1000 GΩ	1	J,K,M (B-D)
D	600	± 10%	-55°C to +125°C	≤ 2.50%	> 100 GΩ	2	K,M
B	1200	± 10%	-55°C to +125°C	≤ 2.50%	> 100 GΩ	2	K,M
W	2000	± 15%	-55°C to +125°C	≤ 2.50%	> 100 GΩ	2	K,M
X	2700	± 15%	-55°C to +125°C	≤ 2.50%	> 100 GΩ	2	K,M
T	4000	± 15%	-55°C to +125°C	≤ 2.50%	> 100 GΩ	2	K,M
Z	8000	+22% -56%	+10°C to +85°C	≤ 4.00%	> 10 GΩ	2	M,Z
Y	12000	+22% -82%	-30°C to +85°C	≤ 4.00%	> 10 GΩ	2	M,Z

* Temperature Coefficient tolerances are per MIL-PRF-49464A

VOLTAGE RATINGS:

50 & 100 WVDC

DIELECTRIC STRENGTH:

2.5 x WVDC min, 25°C, 50 mA max

TEST CONDITIONS:

1) 1.0±0.2 VRMS @1MHz, 25°C

2) for values ≤100pF: 1.0±0.2 VRMS @1MHz, 25°C; for ALL other values: 1.0±0.2 VRMS @1KHZ, 25°C



V-SERIES & B-SERIES BORDER SLC CAPACITORS

Recessed SLC electrode borders help prevent shorting from conductive epoxy squeeze-up and aid visual recognition equipment. The V-Series SLCs feature dual borders (top & bottom) while the B-Series SLCs feature a single border (top-only).


V-SERIES & B-SERIES CAPACITANCE SELECTION

CAP. CODE	CAP. VALUE	V10	V12	V15	V20	V25	V30	V40	V50
		100V	100V	100V	100V	100V	100V	100V	100V
0R1	0.1 pF	C	C	C					
0R2	0.2 pF	N	K	C	C				
0R3	0.3 pF	N	N	K	C	C			
0R4	0.4 pF	V	N	N	K	C			
0R5	0.5 pF	V	N	N	K	C	C		
0R6	0.6 pF	V	V	N	K	K	C		
0R7	0.7 pF	V	V	V	N	K	C		
0R8	0.8 pF	R	V	V	N	K	C		
0R9	0.9 pF	R	V	V	N	K	C	C	
1R0	1.0 pF	R	V	V	N	K	K	C	
1R1	1.1 pF	R	R	V	N	N	K	C	
1R2	1.2 pF	L	R	V	N	N	K	C	
1R3	1.3 pF	L	R	R	N	N	K	C	
1R4	1.4 pF	L	R	R	N	N	K	C	C
1R5	1.5 pF	L	R	R	V	N	K	C	C
1R6	1.6 pF	D	R	R	V	N	K	K	C
1R7	1.7 pF	D	R	R	V	N	K	K	C
1R8	1.8 pF	D	L	R	V	N	K	K	C
1R9	1.9 pF	D	L	L	V	N	N	K	C
2R0	2.0 pF	D	L	L	V	N	N	K	C
2R1	2.1 pF	D	L	L	V	N	N	K	C
2R2	2.2 pF	D	L	L	V	V	N	K	C
2R4	2.4 pF	D	L	L	V	V	N	K	K
2R7	2.7 pF	D	D	L	V	V	N	K	K
3R0	3.0 pF	B	D	D	L	V	N	K	K
3R3	3.3 pF	B	D	D	L	V	N	N	K
3R6	3.6 pF	B	D	D	L	V	N	N	K
3R9	3.9 pF	B	D	D	L	V	V	N	K
4R3	4.3 pF	B	D	D	L	R	V	N	K
4R7	4.7 pF	B	B	D	L	R	V	N	K
5R1	5.1 pF	B	B	D	L	R	V	N	K
5R6	5.6 pF	B	B	B	L	R	V	N	N
6R2	6.2 pF	W	B	B	D	R	V	V	N
6R8	6.8 pF	W	B	B	D	R	V	V	N

CAP. CODE	CAP. VALUE	V10	V12	V15	V20	V25	V30	V40	V50
		100V	100V	100V	100V	100V	100V	100V	100V
6R8	6.8 pF	W	B	B	D	R	V	V	N
7R5	7.5 pF	W	B	B	D	L	R	V	N
8R2	8.2 pF	W	W	B	D	L	R	V	N
9R1	9.1 pF	W	W	B	D	D	R	V	N
100	10 pF	X	W	W	D	D	L	V	V
120	12 pF	X	W	W	B	D	L	R	V
150	15 pF	T	X	W	B	D	L	R	V
180	18 pF	T	X	X	B	D	D	R	R
200	20 pF	T	T	X	B	B	D	L	R
220	22 pF	Z	T	X	B	B	D	L	R
270	27 pF	Z	T	T	W	B	D	D	L
330	33 pF	Y	Z	T	W	B	B	D	L
390	39 pF	Y	Z	Z	X	W	B	D	L
470	47 pF	Y	Z	Z	X	W	B	D	D
500	50 pF	Y	Y	Z	X	W	B	D	D
510	51 pF	Y	Y	Z	T	X	B	D	D
560	56 pF	Y	Y	Z	T	X	B	B	D
680	68 pF		Y	Y	T	X	W	B	D
820	82 pF		Y	Y	Z	T	W	B	D
101	100 pF			Y	Z	T	X	W	B
121	120 pF				Z	T	X	W	B
151	150 pF				Y	Z	T	X	W
181	180 pF				Y	Z	T	T	W
201	200 pF				Y	Z	T	T	X
221	220 pF				Y	Y	Z	T	X
271	270 pF					Y	Z	T	X
331	330 pF					Y	Y	Z	T
391	390 pF						Y	Z	T
471	470 pF						Y	Z	T
561	560 pF						Y	Y	Z
681	680 pF							Y	Z
821	820 pF								Y
102	1000 pF								Y
122	1200 pF								Y


Color breaks used to highlight changes in dielectric material, letters indicate the specific material.

V-SERIES & B-SERIES MECHANICAL CHARACTERISTICS

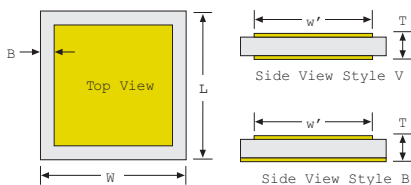

SIZE	V10	V12	V15	V20	V25	V30	V40	V50
W&L ±.001" (mm)	.010 (0.25)	.012 (0.30)	.015 (0.38)	.020 (0.51)	.025 (0.64)	.030 (0.76)	.040 (1.02)	.050 (1.27)
w' NOM. (mm)	.007 (0.17)	.008 (0.20)	.011 (0.28)	.016 (0.41)	.020 (0.51)	.026 (0.66)	.036 (0.91)	.044 (1.12)
B ±.001" (mm)	.001* (0.025)*	.001* (0.025)*	.002 (0.051)	.002 (0.051)	.002 (0.051)	.002 (0.051)	.002 (0.051)	.003 (0.076)
T ±.002" (mm)	NOM. 0.004" ~ 0.008" (NOM. 0.10 ~ 0.20)							
*Min Border 0.0005" Contact factory for other sizes, values or configurations								

U-SERIES STANDARD SINGLE LAYER CAPACITORS



Size		U10	U12	U15	U20	U25	U30	U35	U50	U70
W	+ .001"	.010	.012	.015	.020	.025	.030	.035	.050	.070
(mm)	- .003"	(0.25)	(0.30)	(0.38)	(0.51)	(0.64)	(0.76)	(0.89)	(1.27)	(1.78)
L	MAX.	.012	.015	.020	.025	.030	.035	.040	.060	.080
(mm)		(0.30)	(0.38)	(0.51)	(0.64)	(0.76)	(0.89)	(1.02)	(1.52)	(2.03)
T	± .002"	NOM. 0.004" ~ 0.008" (NOM. 0.10 ~ 0.20)								
(mm)										

Contact factory for other sizes, values or configurations

CAPACITANCE		U10	U12	U15		U20		U25		U30		U35		U50	U70
CODE	VALUE	50V	50V	50V	100V	50V	100V	50V	100V	50V	100V	50V	100V	100V	100V
0R1	0.1 pF	C													
0R2	0.2 pF	K	C		C										
0R3	0.3 pF	N	K	C	K		C								
0R4	0.4 pF	N	N	K	K	C	C		C						
0R5	0.5 pF	U	N	K	N	C	K		C						
0R6	0.6 pF	V	N	K	N	C	K	C	C				C		
0R7	0.7 pF	V	N	N	N	K	K	C	K		C		C		
0R8	0.8 pF	V	U	N	N	K	N	C	K		C		C		
0R9	0.9 pF	R	V	N	U	K	N	C	K	C	C		C		
1R0	1.0 pF	R	V	N	U	K	N	K	K	C	K		C	C	
1R1	1.1 pF	R	V	N	V	K	N	K	K	C	K	C	C	C	
1R2	1.2 pF	R	V	N	V	N	N	K	N	C	K	C	C	C	
1R3	1.3 pF	R	V	N	V	N	N	K	N	C	K	C	K	C	
1R4	1.4 pF	L	V	U	V	N	N	K	N	K	K	C	K	C	
1R5	1.5 pF	L	V	U	V	N	N	K	N	K	K	C	K	C	
1R6	1.6 pF	L	R	U	V	N	U	K	N	K	N	C	K	C	
1R7	1.7 pF	L	R	U	V	N	U	K	N	K	N	C	K	C	
1R8	1.8 pF	L	R	U	R	N	U	N	N	K	N	K	K	C	
1R9	1.9 pF	L	R	V	R	N	U	N	N	K	N	K	K	C	
2R0	2.0 pF	D	R	V	R	N	U	N	N	K	N	K	K	K	
2R1	2.1 pF	D	L	V	R	N	V	N	N	K	N	K	K	K	C
2R2	2.2 pF	D	L	V	R	U	V	N	U	K	N	K	N	K	C
2R4	2.4 pF	D	L	V	R	U	V	N	U	K	N	K	N	K	C
2R7	2.7 pF	D	L	R	L	U	V	N	U	N	N	K	N	K	C
3R0	3.0 pF	D	L	R	L	U	V	N	U	N	N	K	N	K	C
3R3	3.3 pF	D	L	R	L	V	R	N	V	N	U	K	N	K	C
3R6	3.6 pF	D	D	R	L	V	R	U	V	N	U	K	N	K	C
3R9	3.9 pF	B	D	R	L	V	R	U	V	N	U	N	N	N	C
4R3	4.3 pF	B	D	R	D	V	R	U	V	N	V	N	N	N	C
4R7	4.7 pF	B	D	L	D	R	R	U	R	N	V	N	N	N	K
5R1	5.1 pF	B	D	L	D	R	R	V	R	U	V	N	U	N	K
5R6	5.6 pF	B	D	L	D	R	L	V	R	U	V	N	U	N	K
6R2	6.2 pF	B	D	D	D	R	L	V	R	U	V	N	V	N	K
6R8	6.8 pF	B	B	D	D	R	L	R	R	V	R	N	V	N	K
7R5	7.5 pF	W	B	D	D	R	D	R	L	V	R	U	V	N	K
8R2	8.2 pF	W	B	D	B	L	D	R	L	V	R	U	V	N	N
9R1	9.1 pF	W	B	D	B	L	D	R	L	V	R	U	R	N	N
100	10 pF	X	B	D	B	L	D	R	L	R	L	V	R	V	N


Color breaks used to highlight changes in dielectric material, letters indicate the specific material





U SERIES SLC CAPACITANCE SELECTION (CONT.)

CAPACITANCE		U10	U12	U15		U20		U25		U30		U35		U50	U70
CODE	VALUE	50V	50V	50V	100V	50V	100V	50V	100V	50V	100V	50V	100V	100V	100V
100	10 pF	X	B	D	B	L	D	R	L	R	L	V	R	V	N
120	12 pF	X	W	B	B	D	D	L	D	R	L	V	R	V	N
150	15 pF	T	W	B	W	D	B	L	D	R	L	R	L	V	N
180	18 pF	T	W	B	W	D	B	D	D	L	D	R	L	V	V
200	20 pF	T	X	W	W	D	B	D	D	L	D	R	D	R	V
220	22 pF	T	X	W	X	B	B	D	B	L	D	R	D	R	V
270	27 pF	Z	T	W	X	B	W	D	B	D	D	L	D	R	V
330	33 pF	Z	T	X	T	B	W	B	B	D	B	L	D	L	R
390	39 pF	Z	T	X	T	W	X	B	W	D	B	D	B	L	R
470	47 pF	Y	Z	T	T	W	X	B	W	D	B	D	B	D	R
500	50 pF	Y	Z	T	Z	W	X	B	W	B	B	D	B	D	R
510	51 pF	Y	Z	T	Z	W	X	B	W	B	B	D	B	D	R
560	56 pF	Y	Z	T	Z	X	T	B	X	B	W	D	B	D	R
680	68 pF		Z	Z	Z	X	T	W	X	B	W	B	W	D	L
820	82 pF		Y	Z	Y	T	Z	W	T	B	X	B	X	B	D
101	100 pF		Y	Z	Y	T	Z	X	T	W	X	B	X	B	D
121	120 pF			Y	Y	T	Z	T	T	W	T	W	X	B	D
151	150 pF			Y		Z	Y	T	Z	X	T	W	X	B	B
181	180 pF			Y		Z	Y	T	Z	T	T	W	T	W	B
201	200 pF					Z	Y	Z	Z	T	Z	X	T	W	B
221	220 pF					Y	Y	Z	Z	T	Z	X	T	W	B
271	270 pF					Y		Z	Y	T	Z	T	Z	X	W
331	330 pF					Y		Y	Y	Z	Z	T	Z	X	W
391	390 pF							Y		Z	Y	T	Z	T	X
471	470 pF							Y		Z	Y	Z	Y	T	X
561	560 pF							Y		Y		Z	Y	T	T
681	680 pF									Y		Z	Y	Z	T
821	820 pF											Z		Z	T
102	1000 pF											Y		Z	T
122	1200 pF											Y		Y	Z
152	1500 pF													Y	Y
182	1800 pF														Y
202	2000 pF														Y
252	2500 pF														Y
402	4000 pF														


HOW TO ORDER U, V, & B SERIES

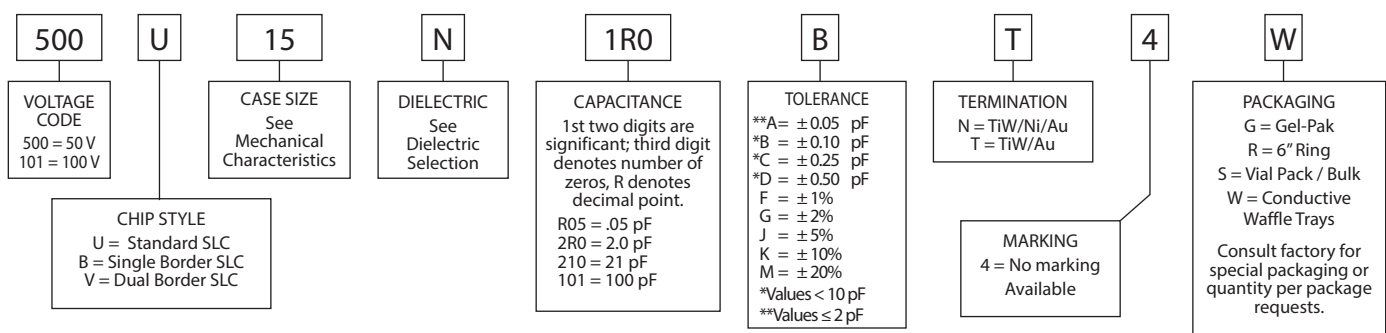

NOTE: The "U" series thick-film terminated SLC's are fully supported and orders may be placed using legacy part numbers. These parts are identified by alpha case size code and contain termination codes "G" or "9" i.e. 500UDDDB200JG4W.

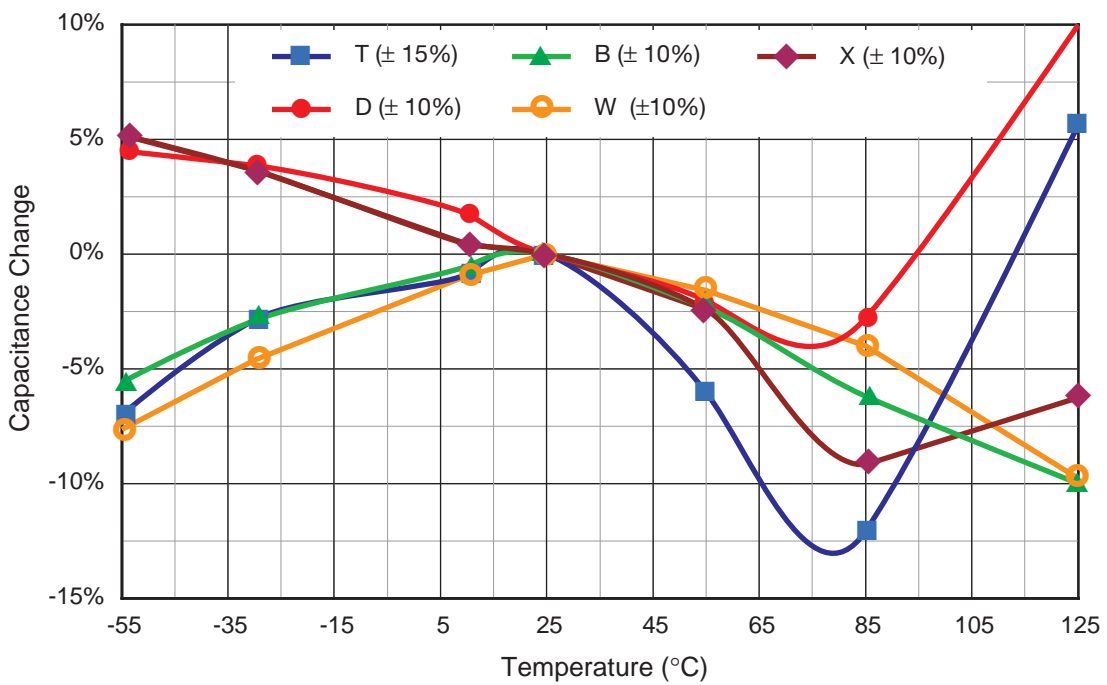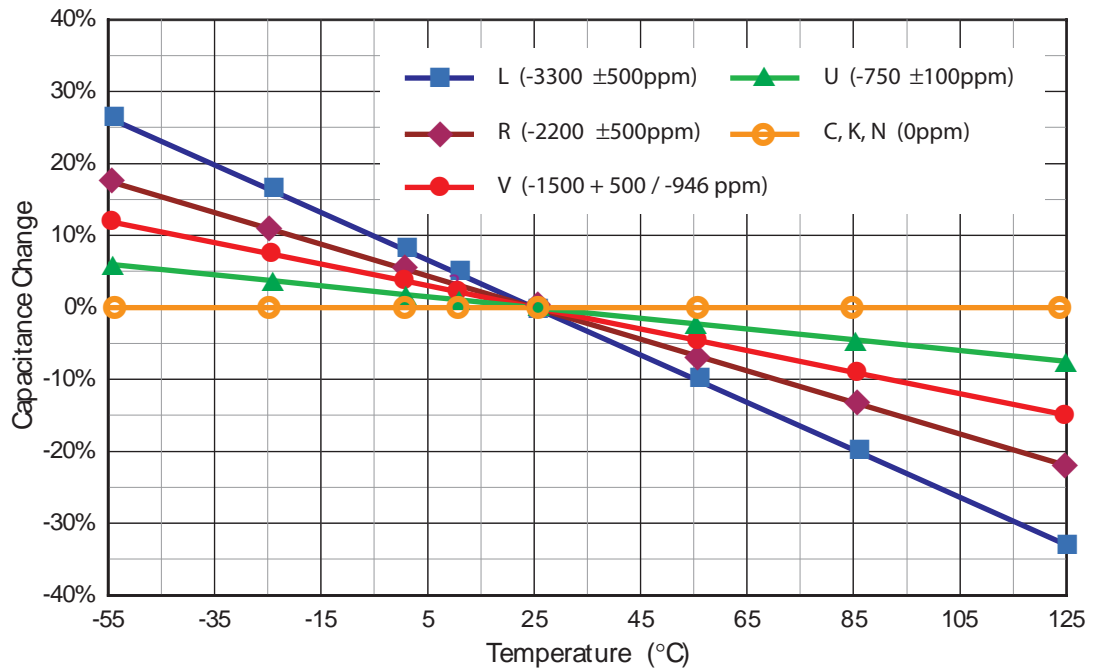

SLC TEMPERATURE CHARACTERISTICS

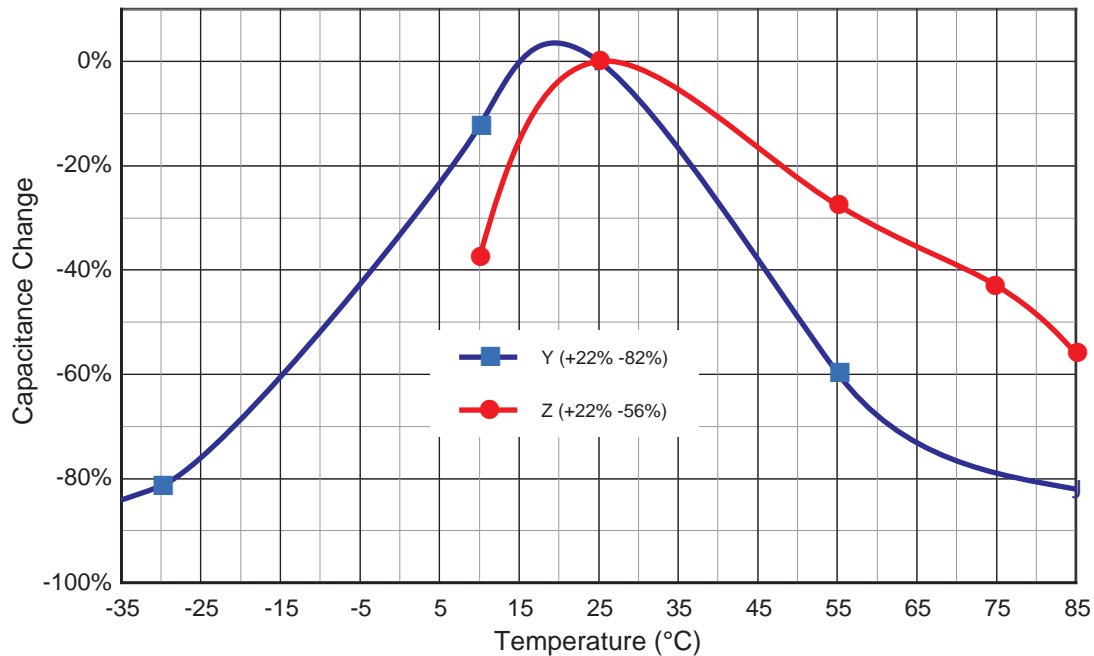

METALLIZATION CHARACTERISTICS FOR GBBL / SLC

METALLIZATION TYPE	TiW/Au (Titanium-Tungsten/Gold)	TiW/Ni/Au (Titanium-Tungsten/Nickel/Gold)
TERMINATION CODE	T	N
ATTACHMENT	Wire / Ribbon Bonding	Pb/Sn or Au/Sn Soldering
COMPATIBILITY	Silver or Gold Conductive Epoxy Au/Ge or Au/Si Eutectic Preform Excellent High Temperature Resistance (400°C) Unsuitable for Pb/Sn or Au/Sn Soldering	Au/Sn Eutectic Preform Moderate High Temp. Resistance (325°C) Long term high temperature may cause Ni diffusion and wire bond problems on Au/Ge

SLC thick-film terminations (legacy codes "G" and "9") are still supported. Contact the factory for compatibility information.

ENVIRONMENTAL CHARACTERISTICS FOR GBBL / SLC

BOND STRENGTH:	Exceeds MIL-S-883, Meth. 2011	VIBRATION: MIL-S-202, Meth. 204-G, (30g, 10-2000 Hz)
SHEAR STRENGTH:	Exceeds MIL-S-883, Meth. 2019	BURN-IN/LIFE TEST: MIL-S-202, Meth. 108, A/F
SOLDER HEAT RESISTANCE:	MIL-S-202, Meth. 210-C, (260±5°C, 5 sec.)	LOW VOLTAGE HUMIDITY: Mil-C-49464, Para. 3.17
SOLDERABILITY:	MIL-S-202, Meth. 208, (245±5°C, 5 sec.)	BAROMETRIC PRESSURE: MIL-S-202, Meth. 105, B
SHOCK:	MIL-S-202, Meth. 213-I, (100g, 6 msec.)	IMMERSION/SALT SPRAY: MIL-S-202, Meth. 104, B
THERMAL SHOCK:	MIL-S-202, Meth. 107, A, (-55 to +125°C)	MOISTURE RESISTANCE: MIL-S-202, Meth. 106